


Domestic booster sets with SIGI submersible pump. The booster sets are suitable for installation where a centrifugal pump can not be used.

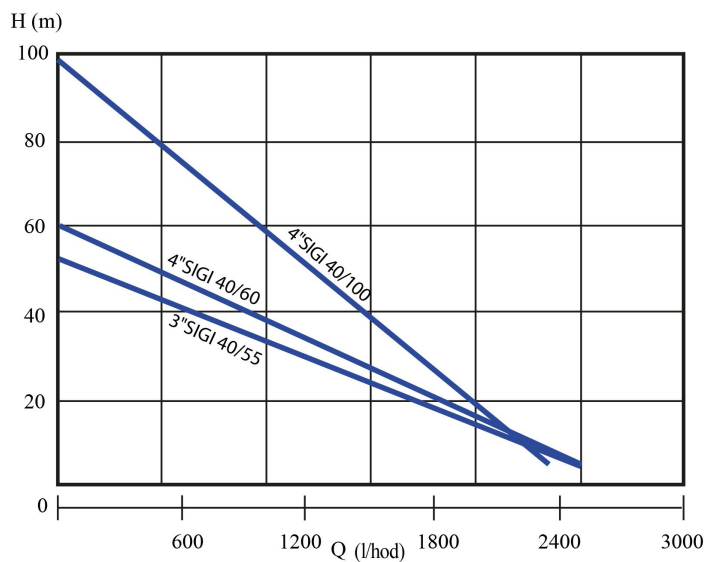

## Construction characteristic

- brass pump body
- brass impellers
- Stainless steel shaft
- stainless steel suction strainer

## Motor

- engine with stainless steel body cooled by mineral oil
- degree of protection IP 58
- insulation class B
- self-lubricating bearing
- speed 2850 rpm
- power cable 20 m H07RN-F
- starting box
- mechanical seal with sand protection

## Usage

- type of liquid: pure water without solid additives and abrasive material
- max. pumped liquid temperature 35°C
- max. immersion 20 m
- max. switching time 20/hour

## Aplikace

- family houses
- chalets, cottages

<b>Power input:</b>	750 W
<b>Q max:</b>	2400 l/h
<b>Head hight:</b>	60 m
<b>Voltage:</b>	230 V
<b>Cable length:</b>	20 m
<b>DNM dimensions:</b>	1"
<b>Max. temperature:</b>	50 °C
<b>ON/OFF Pressure:</b>	2 - 3,5 bar
<b>Tank volume:</b>	35 l

