

SURFACE TANK TO THE BASEMANT S 500

The tanks are suitable as containers for clean or service water under atmospheric pressure. They are lightweight, storable and easy to handle.



Construction characteristic

• made of high-density non-toxic linear polyethylene

Usage


• are suitable as reservoirs of pure or service water under atmospheric pressure


Technical parameters

- are resistant to UV radiation, algae formation, temperature fluctuations, impact and chemicals
- resistant to temperatures up to 60°C
- they can be easily cleaned with conventional cleaning agents
- they are light, storable and easy to handle




SURFACE TANK TO THE BASEMANT S 500





Туре:	S 500
G dimensions:	255 mm
L dimensions - lenght:	1270 mm
H dimensions - height:	725 mm
C dimensions:	720 mm
D dimensions:	310 mm
E dimensions:	300 mm
F dimensions:	100 mm
F dimension:	100 mm
H1 dimensions:	45 mm
H2 dimensions:	670 mm
Connection:	1"
Tank volume:	500 I
Inlet size:	310 mm

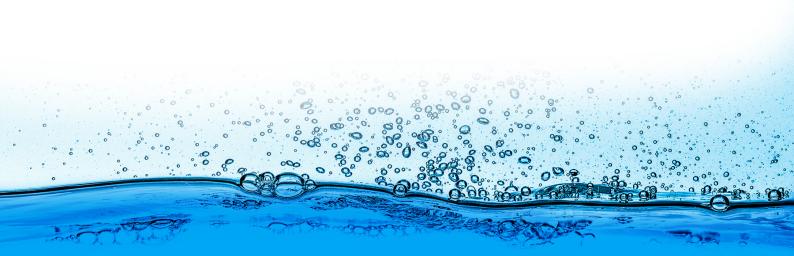

AQUACUP, s.r.o. Kollárova 969 Veselí nad Moravou 698 01 Tel.: +420 572 591 800 E-mail: aquacup@aquacup.cz www.aquacup.cz