

BEST INOX 1500



Submersible sewage pump

All-stainless steel sewage pump designed for demanding conditions — for pumping coarse sludge and heavily contaminated water from excavations, waste sumps, etc. The pump's increased resistance to abrasive materials such as sand, slag, ash, etc. Double mechanical seal, two capacitors, and robust construction make this model ideal for professional use.

Construction characteristics

- pump body made of AISI 304 stainless steel
- impeller made of AISI 304 stainless steel
- shaft made of AISI 304 stainless steel
- special double mechanical seal (ceramic/carbon, silicon/silicon)
- float switch
- 2" connection

Motor


- 230 V
- single-phase version with two capacitors
- protection IP68
- insulation class B
- thermal protection integrated in the motor winding
- speed 2850 rpm
- 10 m HO7RNF flexible cable
- sound pressure level 80 dB

Usage

- type of liquid: wastewater with solid particles up to 50 mm
- maximum liquid temperature: 35 °C

Aplikace

- pumping heavily contaminated wastewater from sumps, basements, and tanks

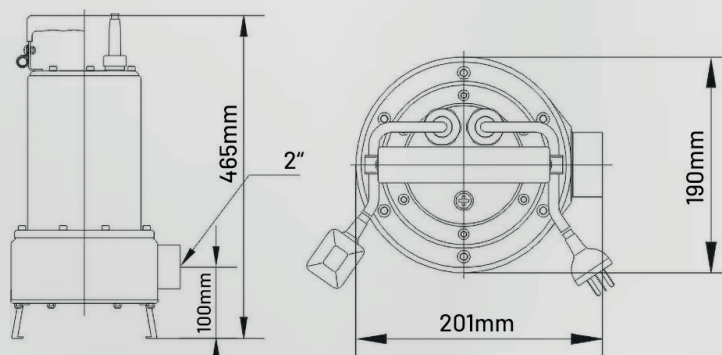

Technical parameters

Type	BEST INOX 1500
Power supply	230 V/50 Hz
Motor power input	1500 W
Max. flow rate (Q max)	30000 l/h
Max. head (H max)	14 m
Max. solids size	50 mm
Ingress protection	IP68
Max. liquid temperature	35 °C
Cable	10 m
Connection DN	2"
Weight	19 kg

