

Domestic boosterset with SIGI submersible pump. This boosterset is suitable for installation where a centrifugal pump can not be used.



## Construction characteristic

---

### Motor


---

### Usage

---

### Aplikace

---

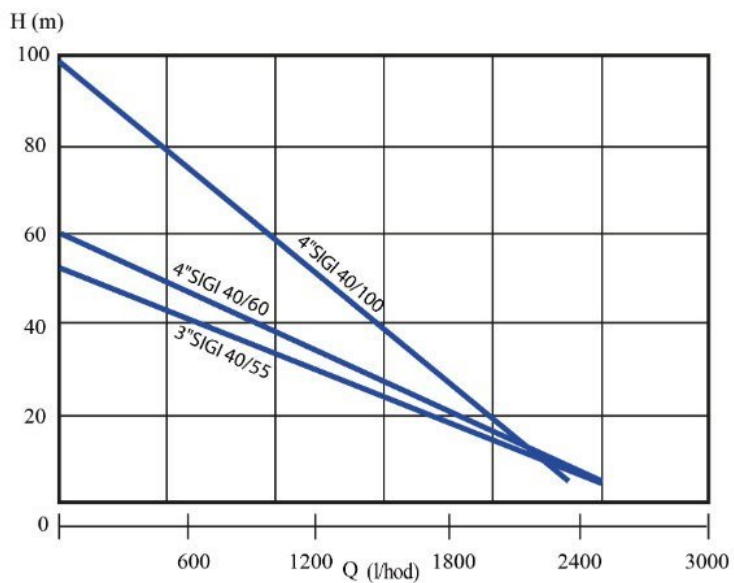

<b>Power input:</b>	750 W
<b>Q max:</b>	2400 l/h
<b>Head hight:</b>	55 m
<b>Voltage:</b>	230 V
<b>Cable length:</b>	20 m
<b>DNM dimensions:</b>	1"
<b>Max. temperature:</b>	35 °C
<b>ON/OFF Pressure:</b>	2 bar
<b>Tank volume:</b>	24 l

