

Domestic boosterset with SIGI submersible pump. This boosterset is suitable for installation where a centrifugal pump can not be used.




Construction characteristic

Motor

Usage

Aplikace

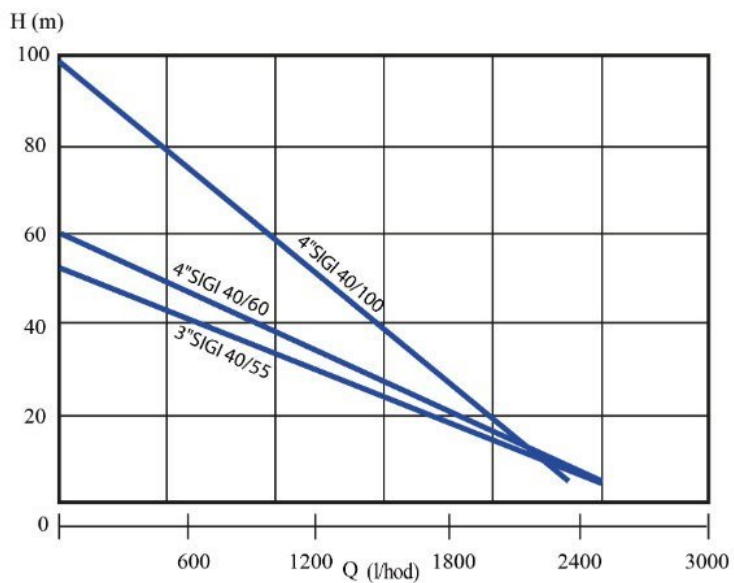

Power input:	750 W
Q max:	2400 l/h
Head hight:	55 m
Voltage:	230 V
Cable length:	20 m
DNM dimensions:	1"
Max. temperature:	35 °C
ON/OFF Pressure:	2 bar
Tank volume:	24 l

