

Pond pumps with a large suction area and a 10 m supply cable are suitable for all water tanks. Their great advantage is the optimal ratio of energy intensity and pump performance and can be installed in ornamental and bathing ponds outside the water tank into a dry pit. Thanks to their construction, they are capable of pumping large dirt and are ideal for filter systems. With a UV lamp and OMEGA filtering, you get a filter set that will provide clear water in your pond. BOSS pumps can be connected to the FT 05 jet and provide various forms of water fountains for larger water areas and fountains.



## Construction characteristic

- technopolymer pump body

## Motor


- degree of protection IP 68
- speed 2850 rpm
- 10 m flexicable HO7 RNF


## Usage

- type of liquid: slightly polluted water
- max. pumped liquid temperature 35°C
- max. height 4,5 m
- max. flow 10 000 l/h

## Aplikace

- garden ponds
- do angličtiny češtiny němčiny water oxidation
- pump for filtrations
- city fountain

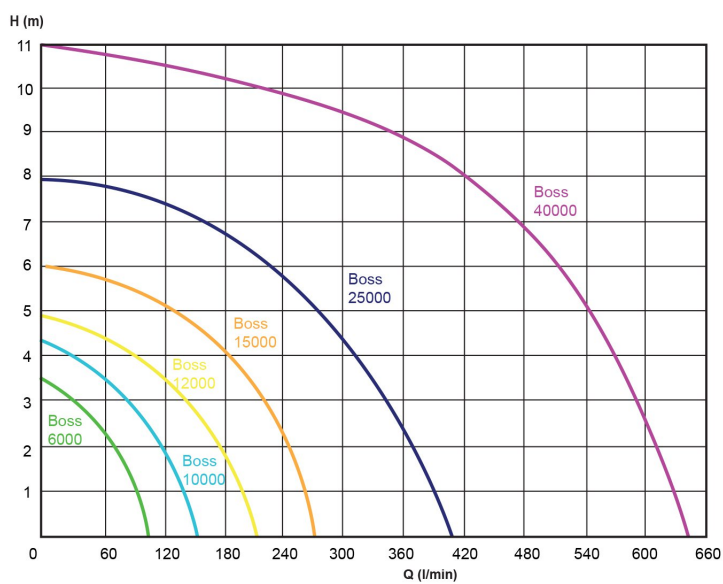

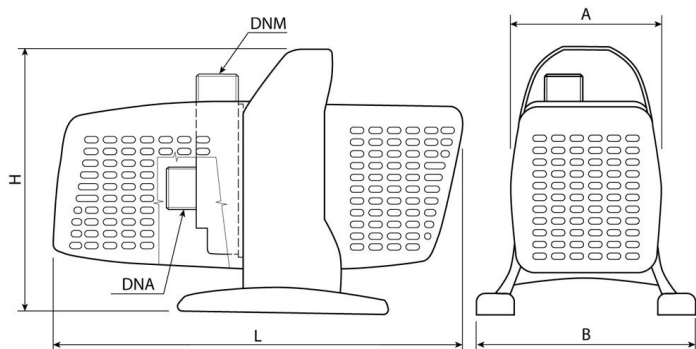

|                               |           |
|-------------------------------|-----------|
| <b>Type:</b>                  | 10000     |
| <b>Power input:</b>           | 135 W     |
| <b>Q max:</b>                 | 10000 l/h |
| <b>Head high:</b>             | 4.5 m     |
| <b>Voltage:</b>               | 230 V     |
| <b>Weight:</b>                | 4,5 kg    |
| <b>Cable length:</b>          | 10 m      |
| <b>L dimensions - length:</b> | 190 mm    |
| <b>H dimensions - height:</b> | mm        |
| <b>A dimensions:</b>          | mm        |
| <b>B dimensions:</b>          | mm        |
| <b>DNA dimensions:</b>        | 5/4"      |
| <b>DNM dimensions:</b>        | 1"        |
| <b>Max. temperature:</b>      | 35 °C     |

