


Domestic booster sets with SIGI submersible pump. The booster sets are suitable for installation where a centrifugal pump can not be used.

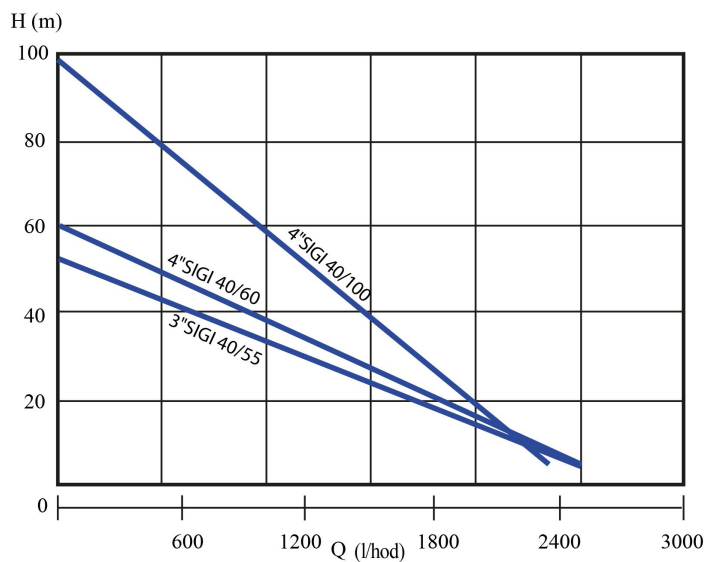

Construction characteristic

- brass pump body
- brass impellers
- Stainless steel shaft
- stainless steel suction strainer

Motor

- engine with stainless steel body cooled by mineral oil
- degree of protection IP 58
- insulation class B
- self-lubricating bearing
- speed 2850 rpm
- power cable 20 m H07RN-F
- starting box
- mechanical seal with sand protection

Usage

- type of liquid: pure water without solid additives and abrasive material
- max. pumped liquid temperature 35°C
- max. immersion 20 m
- max. switching time 20/hour

Aplikace

- family houses
- chalets, cottages

| | |
|--------------------------|-------------|
| Power input: | 750 W |
| Q max: | 2400 l/h |
| Head hight: | 60 m |
| Voltage: | 230 V |
| Cable length: | 20 m |
| DNM dimensions: | 1" |
| Max. temperature: | 50 °C |
| ON/OFF Pressure: | 2 - 3,5 bar |
| Tank volume: | 35 l |

