


Domestic boostersets with centrifugal multistage pump with stainless steel housing equipped with ECONOMY 602 frequency converter with synoptic control and digital display. Frequency inverter ensures constant pressure in the water system, saves power energy and protects the pump from overheating and dry running. Boostersets are suitable for smaller businesses, guesthouses, family houses, cottages, cottages, and pressure boosting.

**NOVINKA  
2024**

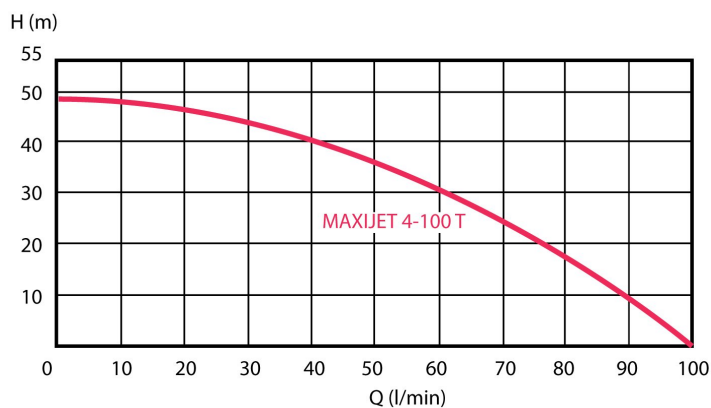

## Construction characteristic

- pump body of stainless steel AISI 304
- circulating and distributing wheels of technopolymer
- suction and discharge parts made of cast iron
- Stainless steel shaft
- a mechanical seal made of graphite and a counterflange made of ceramics

## Motor

- closed, chilled outside
- IPX4 protection
- insulation class F
- single phase version with permanently built-in condenser
- thermal protection in the motor winding
- speed 2850 rpm

## Usage

- type of liquid: pure water without solid additives and abrasive material
- max. pumped liquid temperature 40°C
- max. suction height with 7 m backflow valve
- max. working pressure 6 bar

## Accessory

- pressure vessel 8 lt
- pump Maxijet 4-100 T
- ECONOMY 602 frequency inverter

<b>Power input:</b>	1100 W
<b>Q max:</b>	6000 l/h
<b>Head hight:</b>	48 m
<b>Voltage:</b>	400 V
<b>Weight:</b>	18 kg
<b>DNM dimensions:</b>	1" F
<b>Max. temperature:</b>	40 °C
<b>Tank volume:</b>	8 l
<b>Max. over pressure:</b>	6 bar

