

Pumps are suitable for pumping clean water without solid admixtures or abrasive material.



Construction characteristic

- brass pump body
- brass impellers
- Stainless steel shaft
- stainless steel suction strainer

Motor


- engine with stainless steel body cooled by mineral oil
- degree of protection IP 58
- insulation class B
- self-lubricating bearing
- speed 2850 rpm
- power cable 20 m H07RN-F
- starting box
- mechanical seal with sand protection


Usage

- type of liquid: pure water without solid additives and abrasive material
- max. pumped liquid temperature 35°C
- max. immersion 50 m
- max. switching time 20/hour

Aplikace

- pumping water from bores, wells and reservoirs
- construction of domestic booster-sets
- irrigation

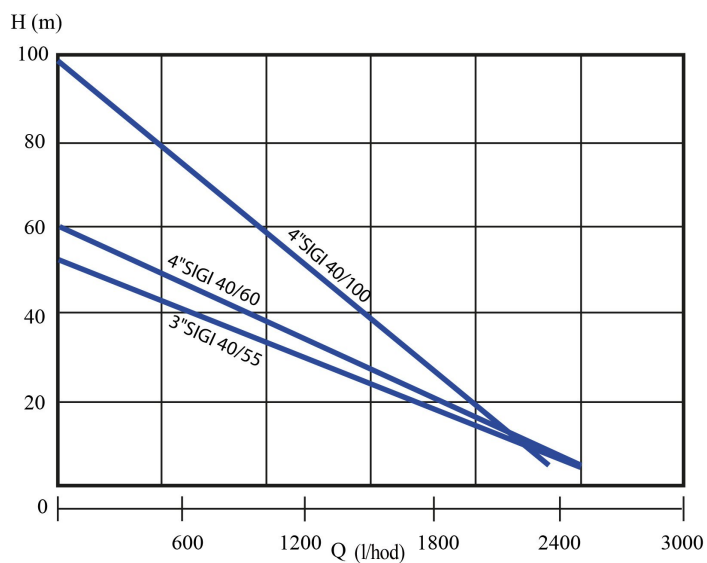

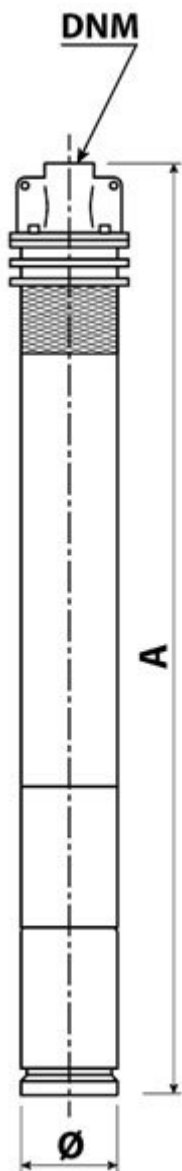

| | |
|--------------------------|----------|
| Type: | 40/55 |
| Power input: | 750 W |
| Q max: | 2400 l/h |
| Head high: | 55 m |
| Voltage: | 230 V |
| Weight: | 11,7 kg |
| Cable length: | 20 m |
| Diameter: | mm |
| A dimensions: | mm |
| DNM dimensions: | 1" |
| Max. temperature: | 35 °C |

