

Pumps are suitable for pumping clean water without solid admixtures or abrasive material.



Construction characteristic

- brass pump body
- brass impellers
- Stainless steel shaft
- stainless steel suction strainer

Motor


- engine with stainless steel body cooled by mineral oil
- degree of protection IP 58
- insulation class B
- self-lubricating bearing
- speed 2850 rpm
- power cable 20 m H07RN-F
- starting box
- mechanical seal with sand protection


Usage

- type of liquid: pure water without solid additives and abrasive material
- max. pumped liquid temperature 35°C
- max. immersion 50 m
- max. switching time 20/hour

Aplikace

- pumping water from bores, wells and reservoirs
- construction of domestic booster-sets
- irrigation

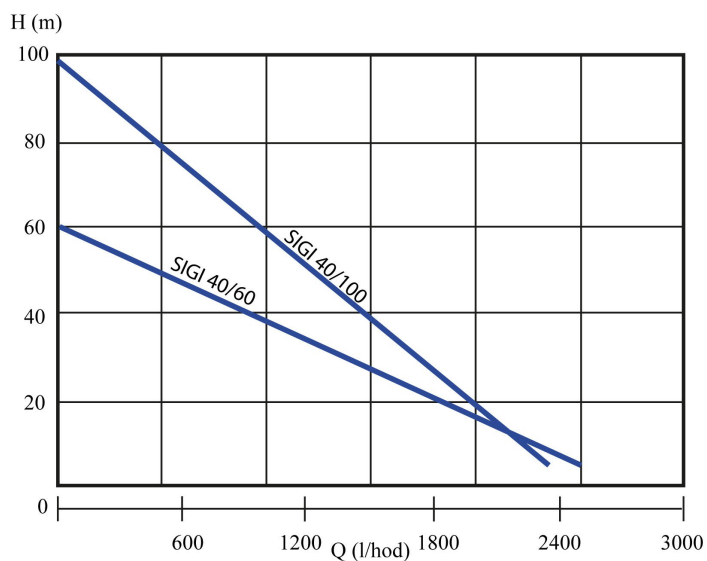

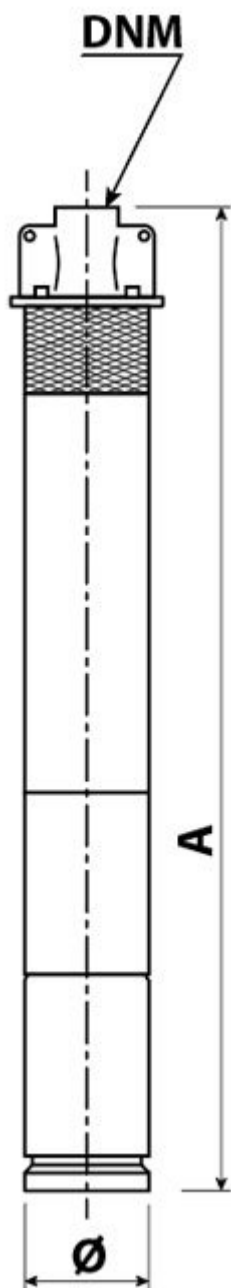

Type:	40/100 M 30 m
Power input:	1100 W
Q max:	2400 l/h
Head high:	100 m
Voltage:	230 V
Weight:	16,5 kg
Cable length:	30 m
Diameter:	96 mm
A dimensions:	552 mm
DNM dimensions:	1"
Max. temperature:	35 °C