

Spindle pumps are suitable for pumping clean, non-aggressive and non-explosive liquid without solid additives. Can be used for irrigation, pumping and construction of domestic boostersets.



### Construction characteristic


- pump housing made of gray cast iron
- stainless steel spindle
- stator steel - rubber


### Motor

- 4" submersible motor
- engine with stainless steel casing
- engine cooled mineral oil (pumps with immersion up to 20m)
- connecting cable 25 m

### Usage

- liquid type: clean, non-aggressive, non-explosive, without solid bodies
- max. pumped liquid temperature 35°C
- number of switching: 20/1 h
- max. height 20 m

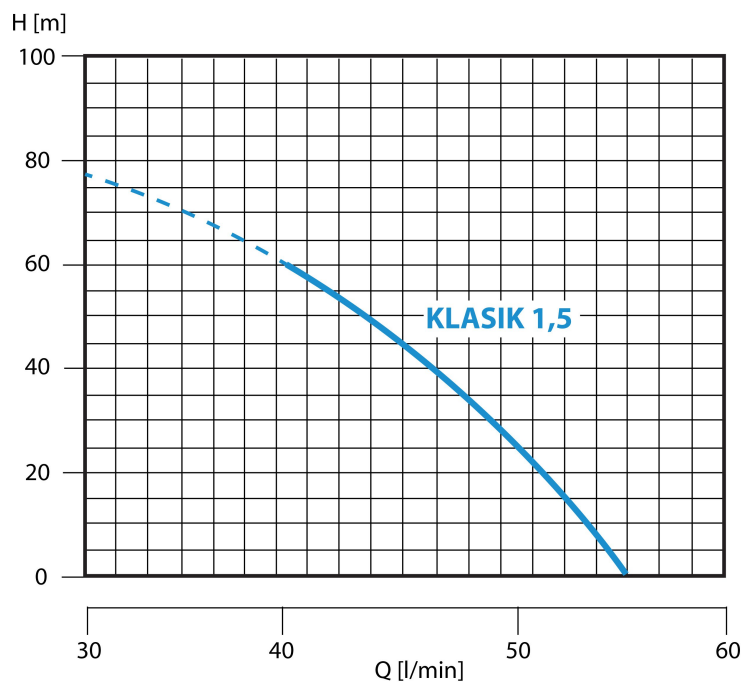

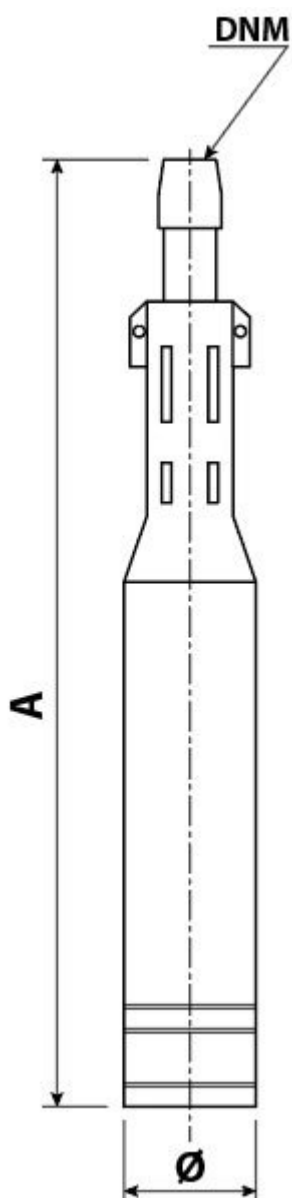

<b>Type:</b>	1,5
<b>Power input:</b>	1500 W
<b>Q max:</b>	3300 l/h
<b>Head high:</b>	78 m
<b>Voltage:</b>	400 V
<b>Weight:</b>	19 kg
<b>Cable length:</b>	25 m
<b>A dimensions:</b>	750 mm
<b>DNM dimensions:</b>	5/4"
<b>Max. temperature:</b>	35 °C
<b>Pump diameter:</b>	96 mm