

Automatic transfer pump for sewage and waste water, equipped with two BESTINOX 1500 pumps equipped with double-seal.



## Construction characteristic


- polyethylene stainless steel anti-corrosion tank 750 l
- plastic lid with thread for easy access to the pump
- simple dismantling of the pump from the box
- the box is fully equipped including electric wiring


## Usage

- waste liquids for household and industry
- pumping waste water and rainwater
- max. operating temperature 40°C

## Pump BESTINOX 1500

- degree of protection IP 68
- insulation class B
- single phase version with 2 built-in condensers
- thermal protection in the motor winding
- speed 2850 rpm
- flexicable 10 m H07RNF
- version with float switch
- pump body of stainless steel AISI 304
- stainless steel impeller AISI 304
- Stainless steel shaft
- special double mechanical seal ceramic/carbon, silicon/silicon
- handle and suction body of stainless steel AISI 304

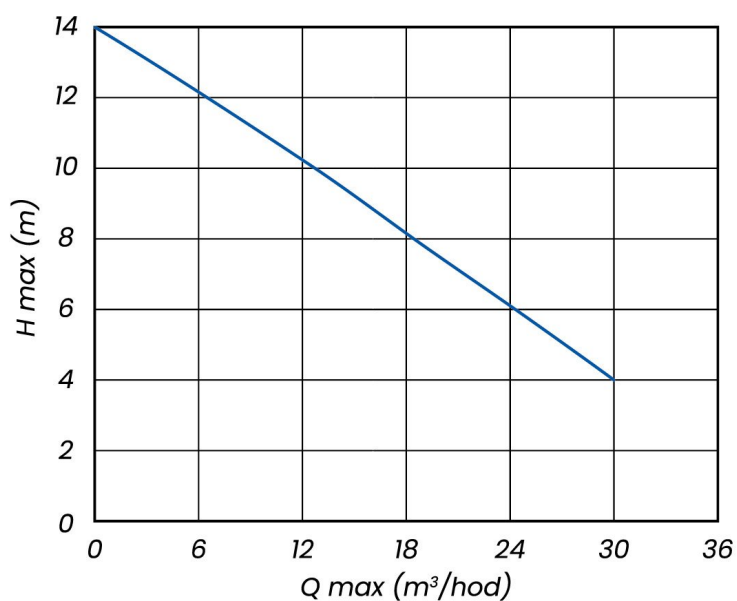

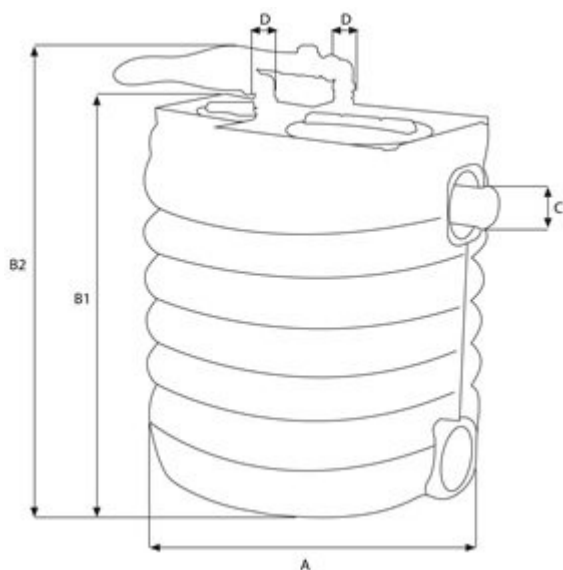

<b>Power input:</b>	2x1500 W
<b>Q max:</b>	60000 l/h
<b>Head high:</b>	m
<b>Voltage:</b>	230 V
<b>Cable length:</b>	10 m
<b>A dimensions:</b>	1100 mm
<b>B dimensions:</b>	1350 mm
<b>B1 dimensions:</b>	1160 mm
<b>C dimensions:</b>	110 mm
<b>D dimensions:</b>	63 mm
<b>Connection:</b>	2"
<b>Max. temperature:</b>	40 °C
<b>Tank volume:</b>	750 l