

Pressure receptacles with replaceable EPDM bag suitable for hot and cold water. The containers need almost no maintenance, just checking the air pressure.



### Construction characteristic


---

- AISI 304 stainless steel tank

### Usage

---

- for the construction of domestic booster-sets
- as expansion tanks for the heating system

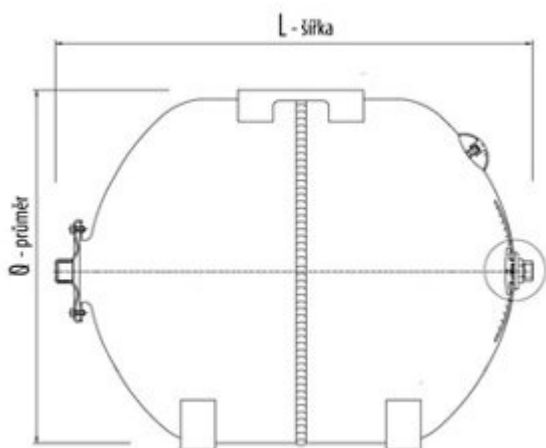

<b>Type:</b>	50 H-SS
<b>Diameter:</b>	mm
<b>L dimensions - lenght:</b>	500 mm
<b>Max. temperature:</b>	100 °C
<b>Tank volume:</b>	50 l
<b>Max. over pressure:</b>	8 bar
<b>Compressed air pre-filling:</b>	1,3-1,8 bar