



Construction characteristic

- AISI 304 suction strainer
- pump foot of stainless steel AISI 304
- pump body of stainless steel AISI 304
- Stainless steel impellers of AISI 304
- power cable 10 m H07RN-F with plug
- double seal
- Stainless steel motor shaft AISI 316 with ceramic insert at wear point

Motor

- dry-run motor with stainless steel body
- degree of protection IP 68
- insulation class F
- single phase version with built-in condenser and thermo protection in motor winding
- the electrical installation chamber is completely insulated
- self-lubricating bearing
- speed 2850 rpm
- designed for continuous operation

Usage


- type of liquid: clean water without solid impurities
- max. pumped liquid temperature 40°C
- max. immersion 7 m
- maximum particle size 1.5 mm
- we recommend installing a sponge filter for ideal pump operation


Aplikace

- fountains
- water games
- waterfalls in gardens

Accessory

- VULCANO nozzle: three adjustable streams
- GAISER nozzle: one adjustable spring with foaming effect
- BELL nozzle: adjustable bell tower

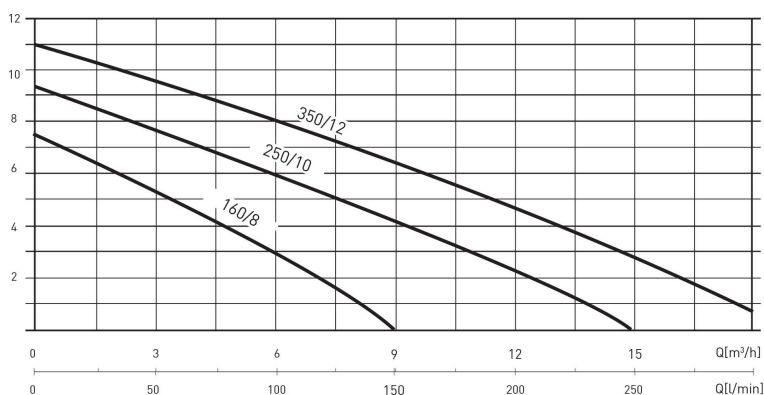

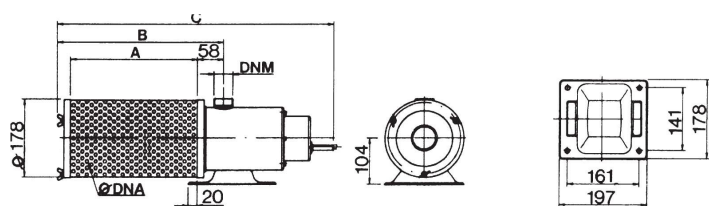

| | |
|------------------------|-------------------|
| Type: | VERSAILLES 250/10 |
| Power input: | 550 W |
| Q max: | 15 000 l/h |
| Head high: | m |
| Voltage: | 230 V |
| Weight: | 7,8 kg |
| Cable length: | 10 m |
| A dimensions: | 285 mm |
| B dimensions: | 372 mm |
| C dimensions: | 620 mm |
| DNM dimensions: | 1 1/4" |