

All-stainless steel drainage pump with direct discharge for pumping dirty water from excavations, pits and the like. Improved pump resistance to abrasive materials with solids up to 10 mm, eg sand, slag, ash, etc. BEST INOX pumps belong to the AQUACUP PREMIUM range, are made of the best and most suitable certified materials and are designed for continuous operation.



### Construction characteristic

- pump body, shaft and AISI 304 stainless steel impeller
- double mechanical seal in oil chamber (carbon / ceramic, silicon / silicon)

### Motor


- protection IP 68
- insulation class B
- single phase version with permanently built-in condenser
- thermal protection in the motor winding
- flexicable 10 m H07RNF
- version with float switch



### Usage

- type of liquid: dirty water with solid impurities up to 10 mm
- max. pumped liquid temperature 40°C
- head height: 16m

### Aplikace

- pumping of polluted water from sumps, pools, cellars, tanks
- irrigation

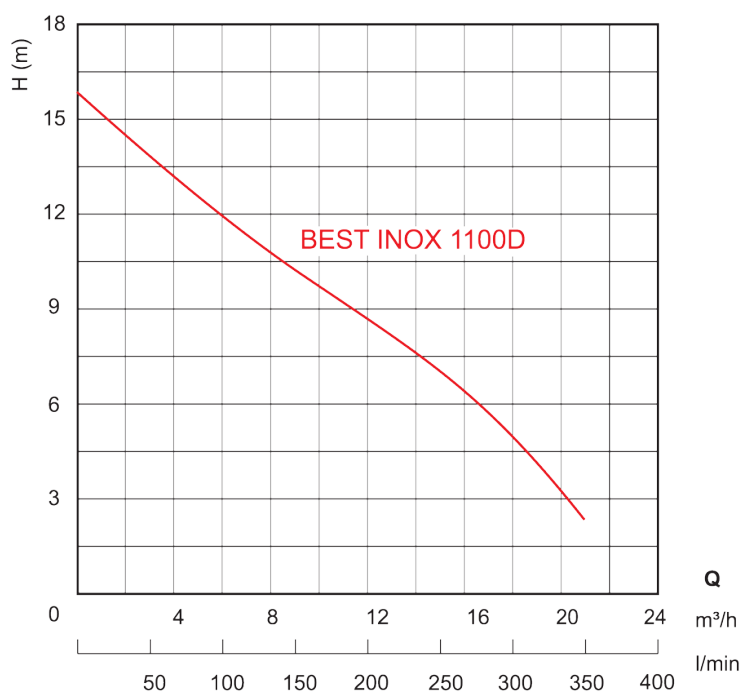

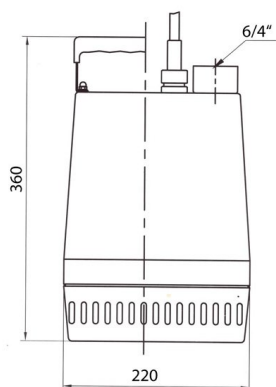

<b>Type:</b>	BEST INNOX 1100 D
<b>Power input:</b>	1100 W
<b>Q max:</b>	21000 l/h
<b>Head high:</b>	16 m
<b>Voltage:</b>	230 V
<b>Weight:</b>	18 kg
<b>Cable length:</b>	10 m
<b>Connection:</b>	6/4"
<b>Max. temperature:</b>	40 °C

