

Pumps are suitable for pumping clean water without solid admixtures or abrasive material.



### Construction characteristic

- stainless steel pump body
- stainless steel suction strainer
- Stainless steel shaft
- impellers from technopolymer with glass fibres
- mechanical seal
- floating switch
- power cable 20 m H07RN-F
- control box

### Motor


- an engine immersed in an oil bath cooled by pumped liquid
- degree of protection IP 68
- insulation class F
- single phase version with control box
- self-lubricating bearing
- speed 2800 rpm


### Usage

- type of liquid: pure water without solid additives and abrasive material
- max. pumped liquid temperature 40°C
- max. immersion 20 m
- max. switching time 30/hour

### Aplikace

- pumping water from bores, wells and reservoirs
- construction of domestic booster-sets
- construction of industrial waterworks
- irrigation

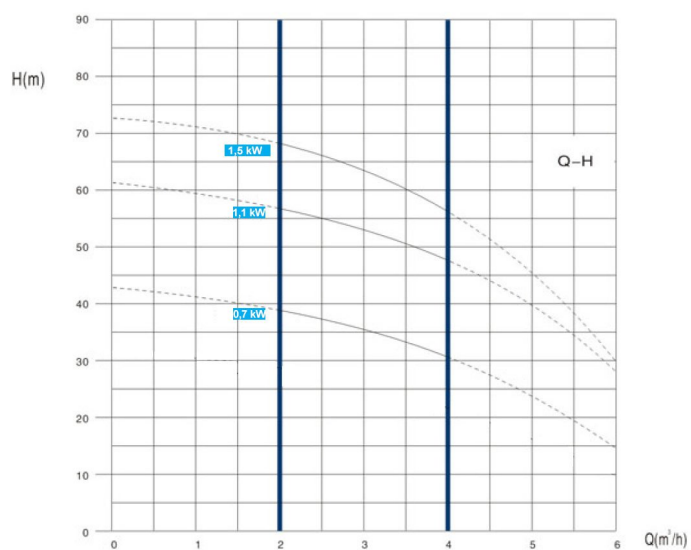

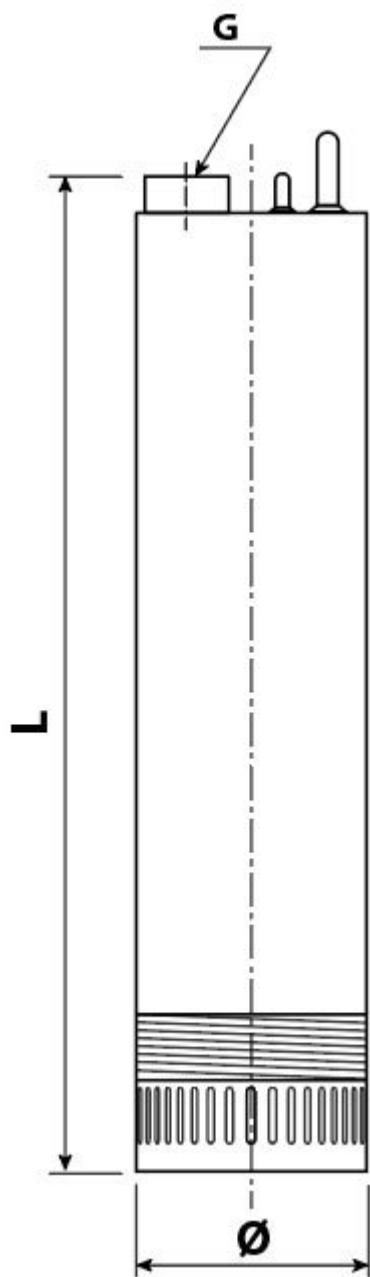

<b>Type:</b>	1100 AUT
<b>Power input:</b>	1100 W
<b>Q max:</b>	l/h
<b>Head hight:</b>	65 m
<b>Voltage:</b>	230 V
<b>Weight:</b>	20 kg
<b>Cable length:</b>	20 m
<b>Diameter:</b>	127 mm
<b>G dimensions:</b>	1 1/4" mm
<b>L dimensions - lenght:</b>	600 mm
<b>Max. temperature:</b>	40 °C