


Pumps suitable for pumping clean water without solid additives and abrasive material.

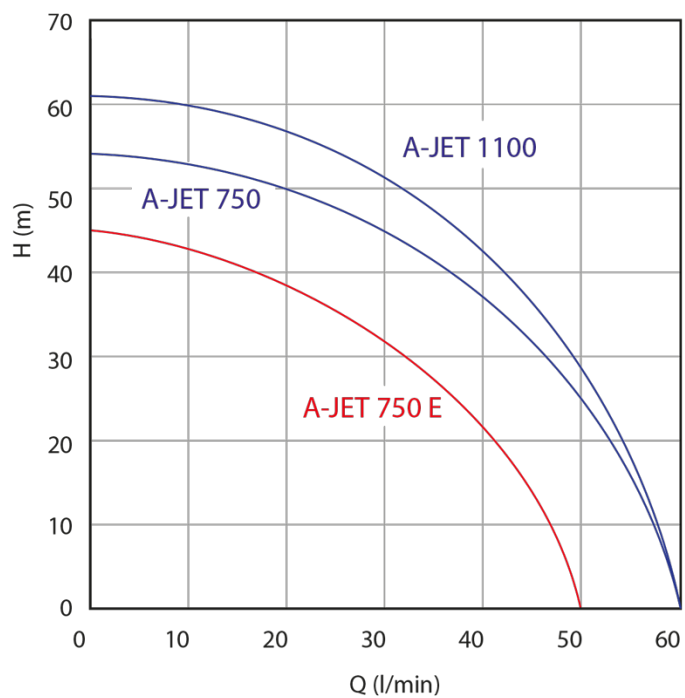

## Construction characteristic

- cast iron pump body
- noryl impellers
- a diffuser and a technopolymer venturi tube
- Stainless steel shaft
- a mechanical seal made of graphite and a counterflange made of ceramics

## Motor


- closed, chilled outside
- IP 44 protection
- single phase version with permanently built-in condenser
- thermal protection in the motor winding
- speed 2850 rpm

## Usage

- type of liquid: pure water without solid additives and abrasive material
- max. pumped liquid temperature 40°C
- max. recommended suction height with non-return valve 8 m
- max. pressure 7,2 bar

## Aplikace

- small pressure devices
- Booster setst
- irrigation
- car washes

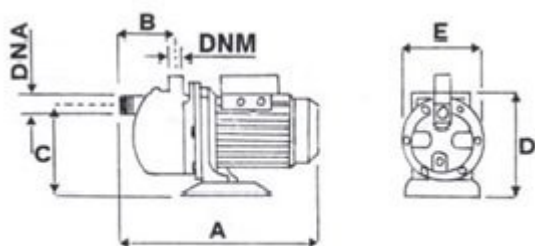

<b>Type:</b>	750 ECO - Noryl impeller
<b>Power input:</b>	750 W
<b>Q max:</b>	3000 l/h
<b>Head hight:</b>	45 m
<b>Voltage:</b>	230 V
<b>Weight:</b>	14 kg
<b>A dimensions:</b>	420 mm
<b>B dimensions:</b>	140 mm
<b>C dimensions:</b>	152 mm
<b>D dimensions:</b>	185 mm
<b>E dimensions:</b>	180 mm
<b>DNA dimensions:</b>	1" F
<b>DNM dimensions:</b>	1" F
<b>Max. temperature:</b>	40 °C
<b>Suction height:</b>	8 m