


Pumps suitable for pumping clean water without solid additives and abrasive material.

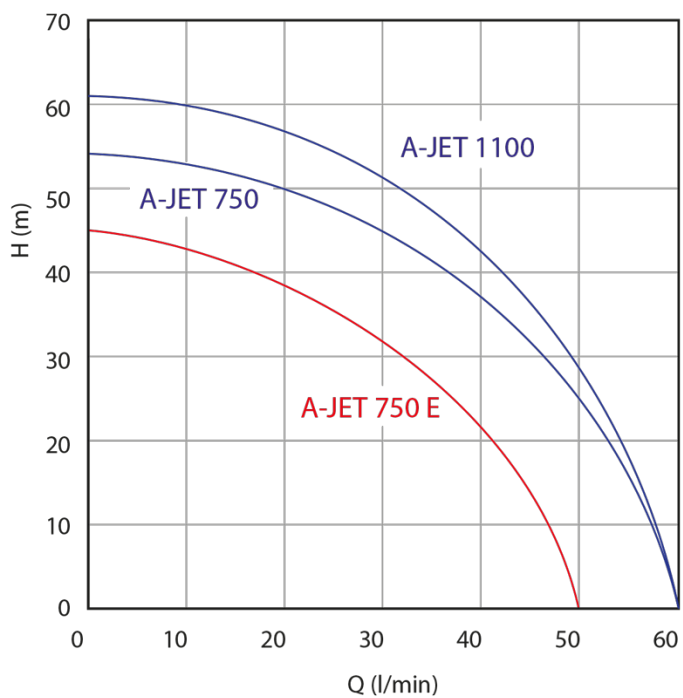

Construction characteristic

- cast iron pump body
- noryl impellers
- a diffusor and a technopolymer venturi tube
- Stainless steel shaft
- a mechanical seal made of graphite and a counterflange made of ceramics

Motor


- closed, chilled outside
- IP 44 protection
- single phase version with permanently built-in condenser
- thermal protection in the motor winding
- speed 2850 rpm

Usage

- type of liquid: pure water without solid additives and abrasive material
- max. pumped liquid temperature 40°C
- max. recommended suction height with non-return valve 8 m
- max. pressure 7,2 bar

Aplikace

- small pressure devices
- Booster setst
- irrigation
- car washes

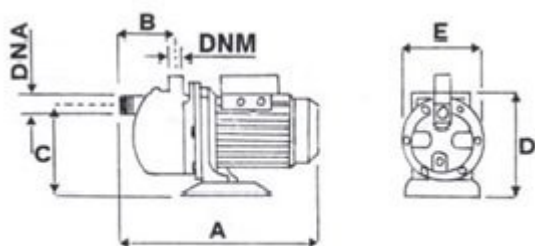

Type:	750 ECO - Noryl impeller
Power input:	750 W
Q max:	3000 l/h
Head hight:	45 m
Voltage:	230 V
Weight:	14 kg
A dimensions:	420 mm
B dimensions:	140 mm
C dimensions:	152 mm
D dimensions:	185 mm
E dimensions:	180 mm
DNA dimensions:	1" F
DNM dimensions:	1" F
Max. temperature:	40 °C
Suction height:	8 m